


**NOTES:**

1. Maximum Cut Slope: 1:1 Rock  
2:1 Soil
2. Maximum Fill Slope: 1-1/2:1 Rock  
2:1 Soil
3. Aggregate material and placement shall conform to Standard Specifications for Public Works Construction, September 1986.
4. Limited sight distance areas, both vertical and horizontal, shall conform to the following minimum specifications:  
Design speed: 15 mph  
Stopping sight distance: 80 feet  
Horizontal curve radius: 50 feet
5. Provide drainage swales/culverts to minimize damage to roadway structure. Culverts shall be designed by licensed Engineer.

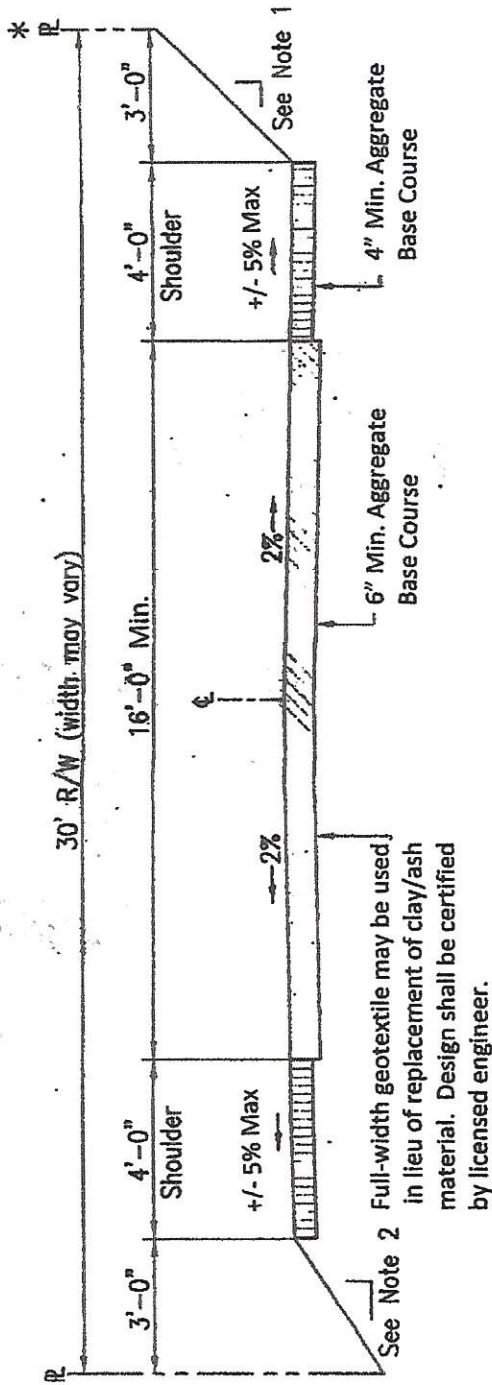

**TYPICAL ROADS-IN-LIMBO CROSS SECTION  
(GRAVEL)**

COUNTY OF HAWAII

TYPICAL ROADS-IN-LIMBO  
CROSS SECTION

GRAVELED SECTION

NOT TO SCALE